

# Avery Dennison® OL-1000/OL-2000 Series Transparent Overlay Film

Issued: November 2016

Avery Dennison® OL-2000 Series Acrylic Transparent Overlay Film is ideal for use in manufacturing traffic control devices and guidance signage. OL-2000 Series is a quality, durable, electronic computer cuttable film that is designed to be laminated over Avery Dennison retroreflective films.

Avery Dennison® OL-1000 Anti Graffiti film is a high quality, clear, pressure-sensitive overlaminate film designed to protect finished signs. Laminate OL-1000 Anti Graffiti film over signs with ink printed systems or electronic cut overlay films to protect from vandalism and solvents. Most types of graffiti can be cleaned from the surface of this film.



**Performance:**  
Same as underlying base sheeting



**Durability:** Same as retroreflective film to which it is applied



**Face:**  
OL-1000: Fluoropolymer  
OL-2000: Acrylic



**Adhesive:** Permanent Pressure Sensitive



**Liner:** Friction Coated Film or Paper

## Features:

- High clarity product for use with Avery Dennison Reflective Sheeting
- Field proven long term durability on safety devices worldwide
- Uniform daytime and nighttime visual appearance
- Conforms to specifications of base reflective sheeting

## Conversion:

- Designed to be used with Avery Dennison Reflective Films
- Designed to be used as part of the Integrated Component System of Avery Dennison Reflective Materials
- Flat Bed Sign-Cut
- Drum Roller Sign-Cut
- Steel Rule Sign-Cut

## Applications:

- Rigid Permanent and Temporary Outdoor Signage
- Rigid Work Zone Devices

## Product Availability:

OL-1000	Anti-Graffiti
OL-2000	Clear
OL-2001	Yellow
OL-2003	Black
OL-2004	Orange
OL-2005	Blue
OL-2007	Green
OL-2008	Red
OL-2009	Brown
OL-2023	Purple
OL-2025	Dark Blue
OL-2027	Dark Green

# Avery Dennison<sup>®</sup> OL-1000/OL-2000 Series Transparent Overlay Film

Issued: November 2016

## Colors and Specification Limits:

Figure A: Daytime Color


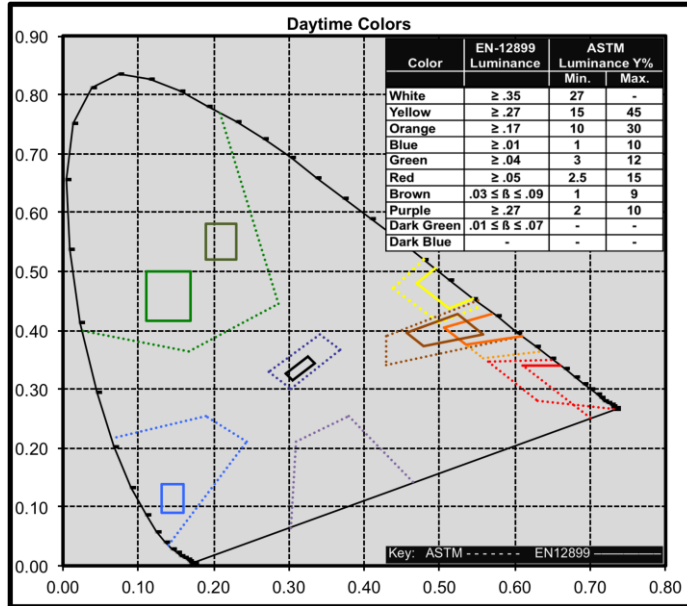


Figure B: Nighttime Color

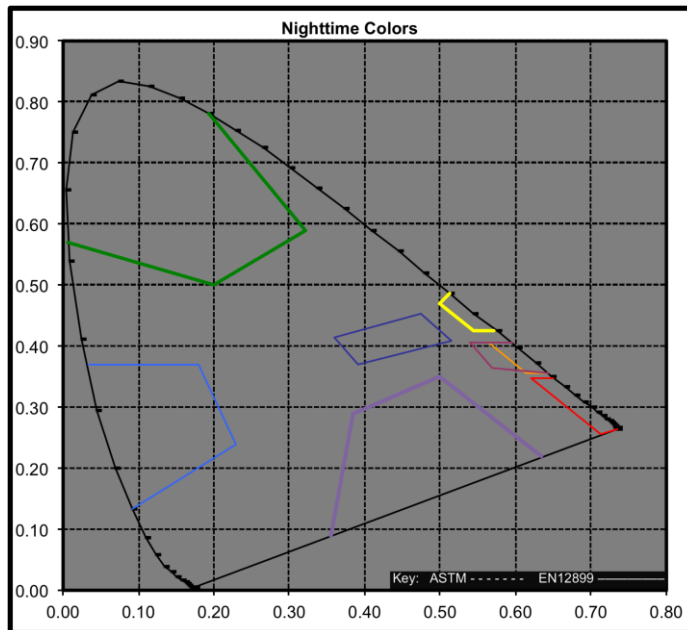

OL-2000 Series Overlay Films meet the current applicable daytime and nighttime color requirements for ASTM D4956 and EN 12889.

### Chromaticity Coordinate Limits

Figures A & B show the four pairs of chromaticity coordinates from ASTM D4956 and EN 12889 on the color grid.

### Daytime Color

The four pairs of chromaticity coordinates in Figure A determine the acceptable color in terms of the CIE 1931 Standard Colorimetric System measured with Standard Illuminant D65 and CIE Publication no. 15 using CIE Standard Illuminant D65 and CIE 45/0 geometry. Luminance factor shall comply with table in Figure A.

Note: The saturation limit of green and blue may extend to the border of the CIE chromaticity locus for spectral colors

### Nighttime Color

The four pairs of chromaticity coordinates in Figure B determine the acceptable color measured using CIE Illuminant A, observation angle of 0.33 degrees, entrance angle of +5 degrees, source and receiver apertures not to exceed 10 minutes of arc, and CIE 1930 (2 degree) standard observer per ASTM D4956.

# Avery Dennison® OL-1000/OL-2000 Series Transparent Overlay Film

Issued: November 2016

## Characteristics:

Property	Value	Instructional Bulletins
Shelf-Life	1 year from date of purchase when stored at the following conditions; 65°-75°F (18°-24°C) and 50% ± 5% R.H.	#8.00
Typical film Caliper	OL-1000: 1.7 – 2.7 mils (43 - 69 µ)  OL-2000: 4 mils (100µ)	NA
Min. Application Temperature	65° F (18° C)	#8.10
Service Temperature	-10°F to +150°F (-23°C to + 65°C)	#8.00
Minimum Adhesion Values (OL-1000 Only)	180° Peel	NA
	Substrate 15 min. Stainless Steel: 1.25 lb./in (15 min 180°) Always pre-test your specific substrate prior to actual application.	
Dimensional Stability (OL-1000 Only)	MD 3% Shrinkage, CD 3.5% Shrinkage	NA

## Solvent Resistance (OL-1000):

When properly processed and applied, the film is resistant to most common solvents. When tested according to LS-300C, Section 3.6.2, immersion in the following solvents for the specified length of time the film shows no deterioration:

Kerosene	10 minutes
Turpentine	10 minutes
Toluene	1 minute
Xylene	1 minute
Methyl Alcohol	1 minute

Product Data Sheet  
Page 3 of 4  
Reflective Solutions  
7542 North Natchez Ave.  
Niles, IL 60714

### WARRANTY

Avery Dennison OL-1000 & OL-2000 Overlay Films ("Products") are warranted to be free from defects in material and workmanship for one (1) year from date of purchase (or the period stated on the specific product information literature in effect at time of delivery, if longer). It is expressly agreed and understood that Avery Dennison's sole obligation and Purchaser's exclusive remedy under this warranty, under any other warranty, express or implied, or otherwise, shall be limited to repair or replacement of defective Product without charge at Avery Dennison's plant or at the location of Product (at Avery Dennison's election), or in the event replacement or repairs is not commercially practical, to Avery Dennison's issuing Purchaser a credit reasonable in light of the defect in the Product.

### CONDITIONS

This warranty shall be effective only if all of the following conditions are met.

Fabrication and/or installation must occur within one (1) year from the date of purchase.

The failure must have resulted solely from a manufacturing defect or deterioration of the Product due to natural causes under the Performance Warranty. Without limiting the generality of the foregoing, there is no warranty for the failure of the sheeting due to improper sign fabrication, improper storage, handling, installation, maintenance, failure of the sign substrate, vandalism or mischief. Slight color fading, cracking, chalking, edge lifting, or slight reduction in gloss or reflectivity will not materially detract from appearance and does not constitute a breach of warranty.

Avery Dennison has published instructional bulletins pertaining to the storage, handling, and cleaning of Product, approved substrates, and application procedures (collectively, the "Procedures"). The Product must have been processed and applied to blank, clean material in accordance with the Procedures, as such may be amended from time to time. Avery Dennison reserves the right to reject any warranty claim where the fabricator or installer cannot satisfactorily prove or demonstrate that the Avery Dennison procedures were utilized. The date of installation, warranty registration, and claim procedures established by Avery Dennison must be followed, and failure to follow such procedures shall void this warranty. Replacement Product carries only the unexpired warranty portion of the Product it replaces. The Product must be properly stored and applied within the shelf-life as stated in the applicable Avery Dennison Product Data Sheet including adhesive and other material product data sheets.

### ADDITIONAL LIMITATIONS

**Unintended Use:** This warranty only applies to Product that is used by professional converters and installers for the defined end uses and in the combinations described in the applicable Avery Dennison Product Data Sheets and Instructional Bulletins. For any other use, the user is responsible for determining the suitability of the Product, and for any and all risk or liability associated with that use or application, and the user agrees to indemnify, defend and hold harmless Avery Dennison for any claims, losses, damages, judgments, expenses and/or expenses, including attorneys fees, resulting from such use or application. This warranty is expressly conditioned on the Product being processed by professional converters or installers in accordance with the Avery Dennison recommended written processing instructions, and being applied to properly prepared surfaces and cleaned and maintained in accordance with recommended Avery Dennison procedures. It is the converters, installers or other users responsibility to perform incoming raw material quality inspections, to assure proper surface preparation and that approved application procedures are followed, to retain converted samples, and to immediately cease using and notify Avery Dennison and/or its authorized agent or distributor of any Product, Materials and/or finished Product discovered to be (or reasonably capable of being discovered to be) defective.

**Misuse and Force Majeure:** Avery Dennison has no obligations or liability under this warranty with respect to Product that has been altered, modified, damaged, misused, abused, subject to accident, neglected or otherwise mishandled or improperly processed or installed. Product is not warranted against premature failure caused by chemical, environmental or mechanical means such as, but not limited to, vandalism, cleaning solutions, paints, solvents, moisture, temperature, mechanical washing equipment, engine fuel spills, engine exhaust, steam, organic solvents or other spilled chemicals pollutants, including industrial and volcanic ash. Damage from fire, structural failure, lightning, accidents, and other force majeure events are not covered by this warranty.

**Third Party Product:** Avery Dennison assumes no responsibility for any injury, loss or damage arising out of the use of a product that is not of our manufacture. Where installer or converter uses or reference is made to a commercially available product, made by another manufacturer, it shall be the responsibility of the user, installer or converter to ascertain the precautionary measures for its use outlined by the manufacturer.

### INDEPENDENT TESTING REQUIRED

All statements, technical information and recommendations about Avery Dennison products are based upon tests and information believed to be reliable but do not constitute a guarantee or warranty of any kind. All Avery Dennison products are sold with the understanding that Purchaser has independently determined the suitability of such products for its intended and other purposes.



[www.reflectives.averydennison.com](http://www.reflectives.averydennison.com)

# Avery Dennison<sup>®</sup> OL-1000/OL-2000 Series Transparent Overlay Film

Issued: November 2016

## Converting Information:

The following Avery Dennison literature will provide information to the user for proper application, storage, and other requirements. Find the latest information on the Avery Dennison website, [www.reflectives.averydennison.com](http://www.reflectives.averydennison.com). We encourage you to check our website periodically for updates.

OL-2000 Series Clear is designed for use with Matan printed reflective sheeting.

### Instructional Bulletins:

Film Care & Handling	#8.00
Substrate Requirements	#8.01
Application Techniques for PS Film	#8.10
Cutting Methods	#8.20
Computer Sign Cutting	#8.25
Matan Thermal Transfer Printing	#8.60

### Substrates:

The application of Avery Dennison OL-1000/OL-2000 Overlay Film Series sheeting is limited to properly prepared Avery Dennison reflective film. Users are urged to carefully evaluate, under actual use conditions, any film application to other substrates. Failure of film caused by other substrates, materials, contamination, or improper surface preparation is not the responsibility of Avery Dennison. See Instruction Bulletin #8.01 for full details on substrate requirements.

### Cleaning Instructions for OL-1000:

Avery Dennison OL-1000 Premium Anti-Graffiti film can be cleaned when defaced with most common graffiti materials. Cleaning is accomplished through the use of a mild graffiti cleaning solvent and should be tested on an inconspicuous area prior to complete treatment.

Materials Required	Action Item
Mild graffiti removal solvent	Generously apply solvent to the entire defaced area Allow the Solvent to set on the material for a period of one minute.
Non-abrasive paper towel	Wipe the solvent and graffiti from the affected area.
Mild graffiti removal solvent Non-abrasive nylon scouring pad	If necessary, reapply the solvent for a period of two minutes on heavily affected areas. Remove with a paper towel then nylon non-abrasive scouring pad.
Paper towel & water	Remove solvent residue with water and a non-abrasive paper towel.

The remedies provided under this warranty are exclusive. In no event shall Avery Dennison be responsible for any direct, indirect, incidental or consequential damages or specific relief whether foreseeable or not, caused by defects in such Product, whether such damage occurs or is discovered before or after replacement or credit, and whether or not such damage is caused by Avery Dennison's negligence. In no event shall Avery Dennison's liability hereunder exceed the remedies specifically set forth in this warranty. Avery Dennison's liability shall be limited, at Avery Dennison's option, to the purchase price, replacement of the defective Product and in some cases when authorized by Avery Dennison the repair and replacement of the defective Product.

**THIS WARRANTY IS GIVEN IN LIEU OF ALL OTHERS. ANY AND ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE HEREBY DISCLAIMED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND MANUALLY SIGNED BY AN OFFICER OF AVERY DENNISON.**

### DEFINITIONS

**Durability:** means that the Product in a finished graphic, panel or sign situated outdoors, subject to the limitations herein and Avery Dennison Product Data Sheets and Instructional Bulletins, and applied to recommended surfaces, will not deteriorate excessively such that the finished sign, panel or graphic is ineffective for its identification when viewed under normal conditions from the intended viewing distance.

**Outdoor Durability:** is based on normal middle European and central North American outdoor exposure conditions and application to recommended surfaces. Actual performance life will depend on a variety of factors, including but not limited to substrate preparation, exposure conditions and maintenance of the Product and finished graphic, panel or sign. In case the finished graphics, panel or sign is in areas of high temperatures or humidity, in industrially polluted areas or other areas with air laden particulate matter, and/or in high altitudes, Outdoor Durability may be reduced. Please see your local Avery Dennison representative for changes to warranties based on such localized conditions.

**Vertical Exposure:** means that the face of the finished graphic is  $\pm 10^\circ$  from vertical.

**Non-Vertical Exposure:** means that the face of the finished graphic is greater than  $10^\circ$  from vertical and greater than  $5^\circ$  from horizontal. Retroreflective films are not warranted for this exposure.

**Flat surfaces:** means a two dimensional flat surface without protruding objects.

**Weathering Effects:** Some degradation of Product performance over time is considered normal wear. Slight color fading, chalking, edge lifting, or slight reduction in gloss or reflectivity due to normal wear exposure and other natural weathering, environmental or other conditions or damage caused by tornadoes, hurricanes, wind, excessive ice buildup or extraordinary frozen particulate conditions, large hail stones or other acts of God, do not constitute a breach of warranty or give rise to any liability by Avery Dennison.

**Printing, Curing and Ink Defects:** Ink contaminations, failures or other defects, or other failures due to improper printing conditions or settings including, but not limited to, unsuitable color calibration, incorrect ICC color profile or incompatible printing, do not constitute a breach of warranty. Product failure caused by ink over-saturation, excessive or under curing, failure of ink to render desired colors on Product, or other treatment or processing errors are not warranted.

**Adhesion to Application Surfaces:** This warranty does not cover the Product if the application surface is not properly prepared; nor does the warranty cover the Product or damage to the substrate because the layers of the substrate separate due to a lower bond between those layers than the bond between the Product and the top layer of the substrate, or surfaces which subsequently crack, peel, outgas, or become damaged beneath the Product

If any court of competent jurisdiction or relevant government agency holds any provision of this warranty and limitation of liability to be illegal, void, invalid or unenforceable, whether in terms of any competition, legislation or otherwise, such provision shall be deleted and severable from this warranty and limitation of liability but deletion shall not affect the validity or enforceability of any other provisions hereof.

Avery Dennison and the logo are registered trademarks or tradenames of Avery Dennison Corp. © 2011 All Rights Reserved.

